





DIVA LC Telescopic Automatic Door




2-leaf telescopic door

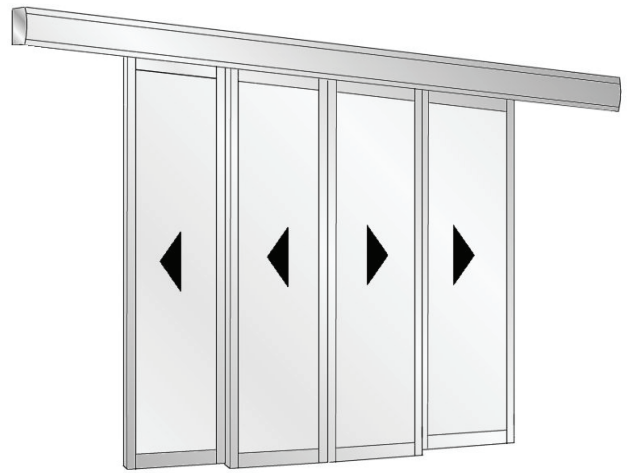

4-leaf telescopic door

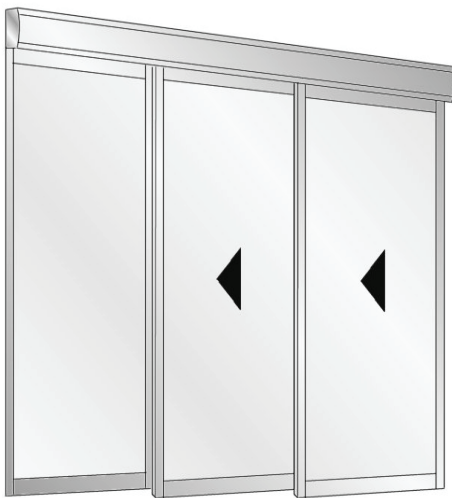



2-leaf telescopic door with fixed leaf

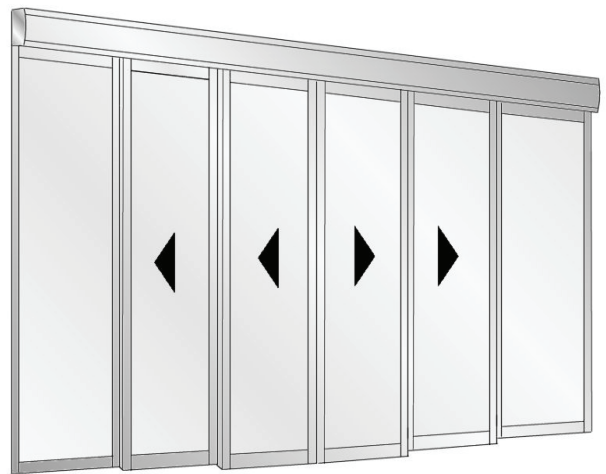

4-leaf telescopic door with fixed leaves



DIVA LC Telescopic Automatic Door

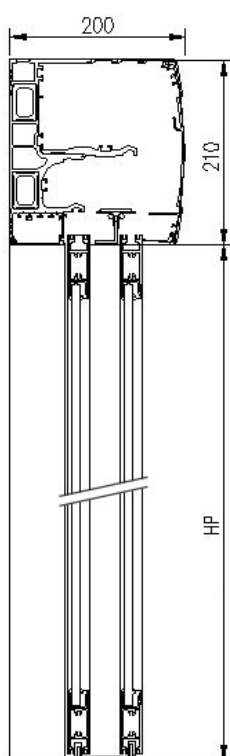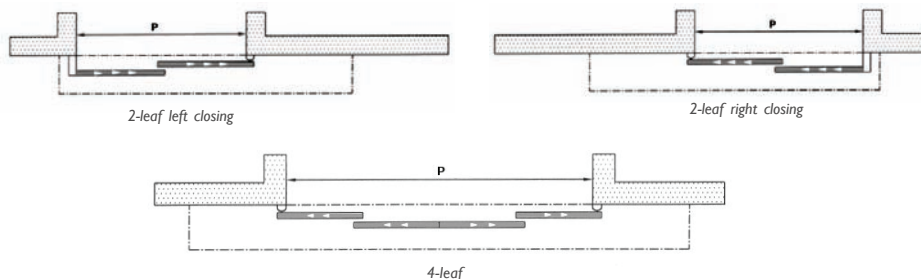

Reinforced casing

Technical Features

Installation

Surface applied on existing structure
Between walls

Opening width (P)

2 leaves min. 800 mm / max. 1800 mm
4 leaves min. 1440 mm / max. 2440 mm

Opening Height (HP)

max. 2 500 mm

Leaf weight

2 leaves max. 2 x 60 kg
4 leaves max. 4 x 40 kg

Structure / Glazing

Mounting with seals Aluminium profiles G25 (25 x 35 mm) Glazing 8 & 10 mm
G38 (38 x 60 mm) Glazing 8/10 & 26 mm

Casing

Self supporting without strengthening profile up to 4 ml
Dim. with strengthening profile 200 x 210 mm

Finish

Raw, RAL lacquering, Anodised (ASI)

Adjustable speed / leaf

Opening 40 to 99 cm/s
Closing 10 to 50 cm/s

Adjustable open force

Opening 3,3 to 20 daN
Closing 3,3 to 15 daN

Hold open time

Time lag 1 to 15 s

Electrical connections

Power supply 230V, 50/60 Hz
Power consumption max/average 165 w / 40 W

