

# **RS HEADER INSPECTION HATCH**

for automatic door

Designed to fit into low-ceiling spaces or provide an aesthetic solution, the RS header inspection hatch conceals the door mechanism within the false ceiling.

It discreetly blends into all types of interiors, offering a harmonious result.

- Sleek and minimalist design
- Simple and secure opening
- Resistant and durable metal structure
- Integration of radars
- Custom length


# EN-FIC32-A - 0.42025 - Portalp reserves the right to modify the products and materials presented without prior notice. Their description cannot, under any circumstances, be considered contractual. Photo credit. Portalp


# **RS HEADER INSPECTION HATCH**

### for automatic door

The header inspection hatch is compatible with sliding or telescopic RS automatic doors. It is securely attached to their end caps using extensions aligned with them.

This assembly is designed for quick and easy opening during maintenance visits. Delivered as a single unit with the operator, it installs efficiently and blends harmoniously into any environment.

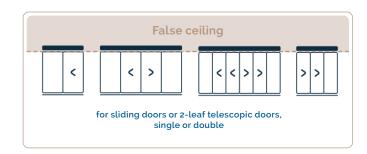

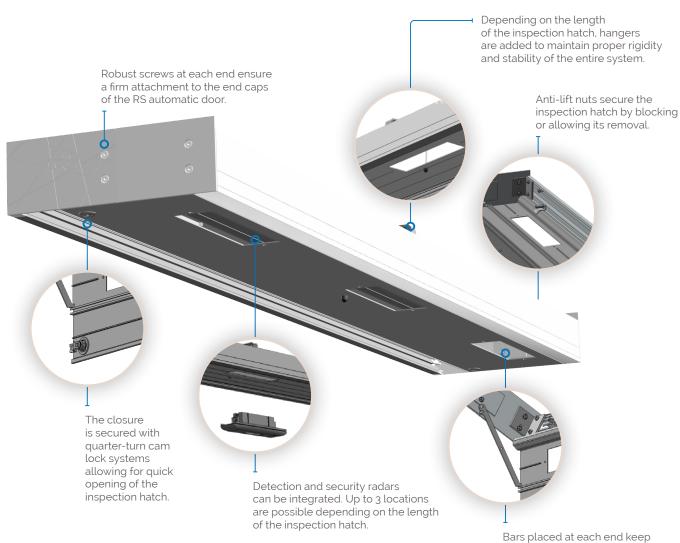

## Features

Structure	Aluminium trap, steel end caps extensions
Dimensions	H 100mm x D 230mm. Length up to 6m
Finish	Inspection hatch RAL finish
Locking	quarter-turn cam lock
Hangers	Up to 3 if length > 2 m black screw caps
Opening	2 holding bars

Detector cut-out Up to 3

Compatibility	RS sliding or 2-leaf telescopic doors, single or double	
	Single of double	





the inspection hatch open

during technical interventions.